


Tlakové spínače

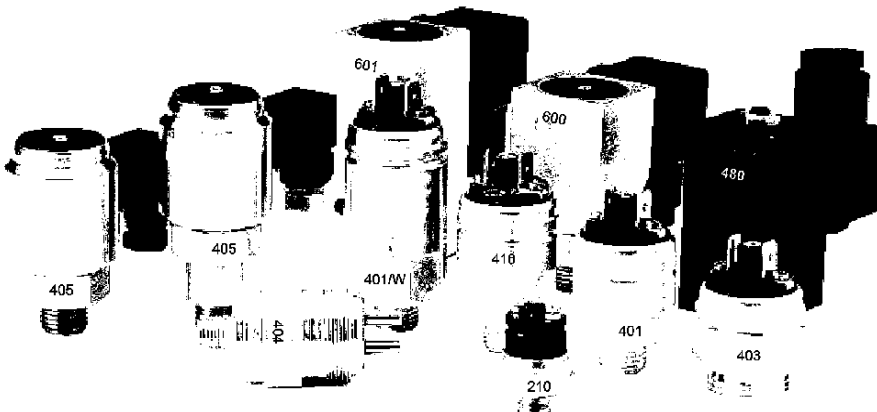

Typ	Kontakty		Rozsahy	El. připojení	Max. U	kč/kus
210	ON	bar	1.X	šroub s maticí M2 x	42V	362
211	ON/OFF	bar	0.5-10	FAST ON 6.3 x	42V	362
212	ON/OFF	bar	V.70	FAST ON 6.3 x	42V	450
300	SW	mbar	20-800 podtlak	FAST ON 6.3 x	42V	775
330	SW	mbar	20-800 podtlak	konektor DIN 43650, Pg9	250V	2 125
400	ON/OFF	bar	0.3-2, 1-10	šroub M2.5 x	42V	425
		bar	X.70			550
401	ON/OFF	bar	0.3-2, 1-10, 10-70	FAST ON 6.3 x	42V	425
401/W	SW	bar	0.3-2, 1-10	FAST ON 6.3 x	42V	950
		bar	10-70, 50-200			1 037
403	ON/OFF	bar	0.3-2, 1-10, 10-70	FAST ON 6.3 x	42V	1 000
404	ON	bar	0.3-2, 1-10, 10-70, 50-200	válcové kontakty	42V	600
405	ON/OFF	bar	0.3-2, 1-10	mini konektor, Pg7	250V	987
		bar	10-70, 50-200			1 125
410	ON/OFF	bar	50-200, 100-350	FAST ON 6.3 x	42V	562
480	SW	bar	0.3-6, 1-16	konektor DIN 43650, Pg9	250V	1 562
600	SW	bar	0.3-2, 1-10,	konektor DIN 43650, Pg9	250V	1 287
		bar	10-70, 50-200			1 412
601	SW	bar	0.3-2, 1-10,	konektor DIN 43650, Pg9	250V	1 812
		bar	10-70, 50-200			1 937
602	SW	bar	50-400	konektor DIN 43650, Pg9	250V	2 275
640	SW	bar	10-70, 50-250, 200-400	konektor DIN 43650, Pg9	250V	2 887
705	SW	bar	0.3-2	konektor DIN 43650, Pg9	250V	2 475
710	SW	bar	0.5-3	konektor DIN 43650, Pg9	250V	3 244
720	SW	bar	2-10, 5-50	konektor DIN 43650, Pg9	250V	2 687